

# Lifting Beams


## Model 22 – Heavy Duty Twin Basket Sling Lifting Beam



**QUICKSHIP PROGRAM**

### PRODUCT FEATURES:

- Designed to be used with slings in a basket hitch.
- Specially designed hooks with hook latches minimize potential sling damage.
- Two sets of fixed hooks are standard in all lengths over 4'.
- The inner set of hooks (S2) are 1/2 the overall spread.
- Extra spreads available upon request.
- Complies with ASME standards.

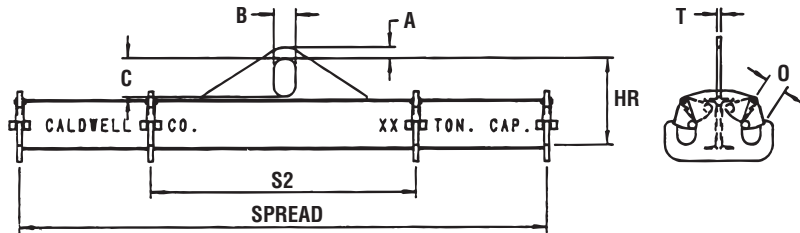

### SPECIFICATIONS

Capacity (tons)	Model Number	HR Headroom (in.)	Weight (lbs.)	Spread (feet)										Other Dimensions (in.)	
				3	4	6	8	10	12	14	16	18	20		
1/2	<b>Model Number</b>	<b>22-1/2-3</b>	<b>22-1/2-4</b>	<b>22-1/2-6</b>	<b>22-1/2-8</b>	<b>22-1/2-10</b>	<b>22-1/2-12</b>	<b>22-1/2-14</b>	<b>22-1/2-16</b>	<b>22-1/2-18</b>	<b>22-1/2-20</b>	<b>22-1/2-24</b>	<b>22-1/2-30</b>	A=7/8	T=3/4
	HR Headroom	8-1/2	8-1/2	8-1/2	8-1/2	9-1/2	9-1/2	10-1/2	10-1/2	11-1/2	11-1/2	12-1/2	13-1/2	B=3	O=1-1/16
	Weight	50	65	110	150	200	220	298	331	424	463	627	855	C=5	
1	<b>Model Number</b>	<b>22-1-3</b>	<b>22-1-4</b>	<b>22-1-6</b>	<b>22-1-8</b>	<b>22-1-10</b>	<b>22-1-12</b>	<b>22-1-14</b>	<b>22-1-16</b>	<b>22-1-18</b>	<b>22-1-20</b>	<b>22-1-24</b>	<b>22-1-30</b>	A=7/8	T=3/4
	HR Headroom	8-1/2	8-1/2	9-1/2	10-1/2	10-1/2	11-1/2	11-1/2	12-1/2	13-1/2	13-1/2	15-1/2	15-1/2	B=3	O=1-1/8
	Weight	50	65	145	210	230	290	338	390	539	588	907	1150	C=5	
2	<b>Model Number</b>	<b>22-2-3</b>	<b>22-2-4</b>	<b>22-2-6</b>	<b>22-2-8</b>	<b>22-2-10</b>	<b>22-2-12</b>	<b>22-2-14</b>	<b>22-2-16</b>	<b>22-2-18</b>	<b>22-2-20</b>	<b>22-2-24</b>	<b>22-2-30</b>	A=7/8	T=3/4
	HR Headroom	9-1/2	10-1/2	10-1/2	11-1/2	12-1/2	13-1/2	13-1/2	14-1/2	15-1/2	15-1/2	17-1/2	20-1/2	B=3	O=1-1/8
	Weight	70	90	160	225	300	375	447	515	725	815	1221	2272	C=5	
5	<b>Model Number</b>	<b>22-5-3</b>	<b>22-5-4</b>	<b>22-5-6</b>	<b>22-5-8</b>	<b>22-5-10</b>	<b>22-5-12</b>	<b>22-5-14*</b>	<b>22-5-16*</b>	<b>22-5-18*</b>	<b>22-5-20*</b>	<b>22-5-24*</b>	<b>22-5-30*</b>	A=2	T=1
	HR Headroom	13-1/2	14-1/2	15-1/2	16-1/2	16-1/2	16-1/2	19	19-1/2	22-1/2	22-1/2	25-1/2	25-1/2	B=4	T=1-1/4*
	Weight	90	160	275	350	450	500	854	940	1398	1650	2144	2330	C=7	O=1-1/8
7-1/2	<b>Model Number</b>	<b>22-7 1/2-3</b>	<b>22-7 1/2-4</b>	<b>22-7 1/2-6</b>	<b>22-7 1/2-8</b>	<b>22-7 1/2-10</b>	<b>22-7 1/2-12</b>	<b>22-7 1/2-14</b>	<b>22-7 1/2-16</b>	<b>22-7 1/2-18</b>	<b>22-7 1/2-20</b>	<b>22-7 1/2-24</b>	<b>22-7 1/2-30</b>	A=2	T=1-1/4
	HR Headroom	14-1/2	15-1/2	16-1/2	17-1/2	17-1/2	19-1/2	22-1/2	22-1/2	22-1/2	22-1/2	25-1/2	25-1/2	B=4	O=1-3/4
	Weight	155	180	330	410	500	700	1162	1300	1468	1606	2354	2877	C=7	
10	<b>Model Number</b>	<b>22-10-3</b>	<b>22-10-4</b>	<b>22-10-6</b>	<b>22-10-8</b>	<b>22-10-10</b>	<b>22-10-12</b>	<b>22-10-14</b>	<b>22-10-16</b>	<b>22-10-18</b>	<b>22-10-20</b>	<b>22-10-24</b>	<b>22-10-30</b>	A=2	T=1-1/4
	HR Headroom	15-1/2	16-1/2	17-1/2	19-1/2	22-1/2	19-1/2	22-1/2	22-1/2	25-1/2	25-1/2	25-1/2	25-1/2	B=4	O=1-3/4
	Weight	150	200	360	500	850	1000	1147	1299	1741	1943	2335	2962	C=7	
15	<b>Model Number</b>	<b>22-15-3</b>	<b>22-15-4</b>	<b>22-15-6</b>	<b>22-15-8</b>	<b>22-15-10</b>	<b>22-15-12</b>	<b>22-15-14</b>	<b>22-15-16</b>	<b>22-15-18</b>	<b>22-15-20</b>	<b>22-15-24</b>	<b>22-15-30</b>	A=2-1/2	T=1-1/2
	HR Headroom	18-1/2	19-1/2	21-1/2	21-1/2	24-1/2	27-1/2	27-1/2	27-1/2	27-1/2	27-1/2	27-1/2	30	B=5	O=4
	Weight	397	471	970	1240	1256	1980	2065	2100	2391	2584	4045	4100	C=9	
20	<b>Model Number</b>	<b>22-20-3</b>	<b>22-20-4</b>	<b>22-20-6</b>	<b>22-20-8</b>	<b>22-20-10</b>	<b>22-20-12</b>	<b>22-20-14</b>	<b>22-20-16</b>	<b>22-20-18</b>	<b>22-20-20</b>	<b>22-20-24</b>	<b>22-20-30</b>	A=2-1/2	T=1-1/2
	HR Headroom	19-1/2	21-1/2	21-1/2	24-1/2	24-1/2	24-1/2	27-1/2	27-1/2	27-1/2	27-1/2	31	31	B=5	O=4
	Weight	253	328	910	1000	1150	1740	1935	2210	2480	2755	3500	4500	C=9	

Model 22G - custom designed lifter with segmented sling saddle on the top of the beam can further reduce beam headroom and increased sling spread adjustment.

