

# Lifting Beams


## Model 27SL – Bulk Container Lifting Beams



**QUICKSHIP  
PROGRAM**

### PRODUCT FEATURES:

- Constructed of tubing for smooth surface with no sharp edges.
- Low headroom design.
- Easily attach to load with open lifting lugs.
- Lug spacing will hold up to a 3" wide loop.
- Oversized lifting eye to accept a wide range of hooks.
- Complies with ASME standards.

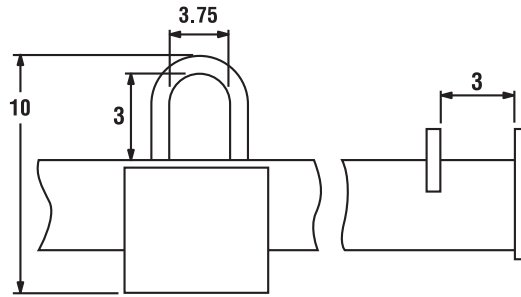

**NOTE:** All dimensions shown in inches.



### SPECIFICATIONS

| Model Number | Capacity (lbs.) | Span (in.) | Weight (lbs.) |
|--------------|-----------------|------------|---------------|
| 27SL-1MT-36  | 2200            | 36         | 150           |
| 27SL-1MT-48  | 2200            | 48         | 185           |
| 27SL-2MT-36  | 4400            | 36         | 155           |
| 27SL-2MT-48  | 4400            | 48         | 190           |

Other sizes available, please consult factory.

## Model 27SD – Standard Adjustable Four Point Lifting Beam



### PRODUCT FEATURES:

- Low headroom design.
- Swivel hooks with latches standard.
- Adjustable spreads on 1' increments.
- Faspins for easy crossarm adjustment.
- Complies with ASME standards.

### SPECIFICATIONS

| Model<br>Number | Capacity<br>(tons) | Dimensions (inches)    |                        |      |      |   |   |      |      | Weight<br>(lbs.) |
|-----------------|--------------------|------------------------|------------------------|------|------|---|---|------|------|------------------|
|                 |                    | Main Beam<br>Min./Max. | Crossarms<br>Min./Max. | HR   | Bail |   |   |      | O    |                  |
|                 |                    |                        |                        |      | A    | B | C | T    |      |                  |
| 27SD-3-84/60    | 3                  | 36/84                  | 24/60                  | 28.2 | 1.25 | 3 | 5 | 1    | 0.97 | 375              |
| 27SD-5-120/96   | 5                  | 48/120                 | 36/96                  | 32.7 | 2    | 4 | 7 | 1.25 | 1.06 | 760              |
| 27SD-10-144/96  | 10                 | 72/144                 | 36/96                  | 42.0 | 2    | 4 | 7 | 1.25 | 1.41 | 1530             |

Custom sizes and capacities available. Please fill out the Lifting Beam Application Evaluation on page A.22.

